



Face-to-Face Swing – Product Specification



Face-to-Face Swing

Who swings higher? Up to six people enjoy high-flying adventures at the same time on the Face-To-Face Swing.

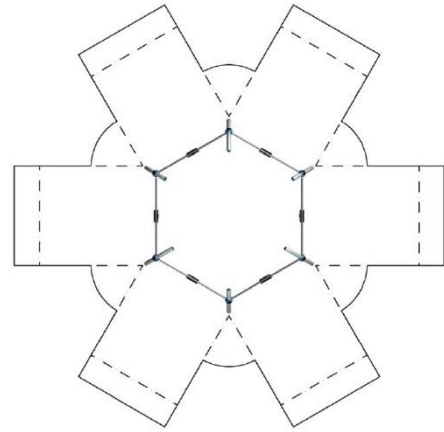

Face-to-Face Swing – at a glance.

Product Family:	Playpoints	Number of Foundations:	6 pc.
Item Number:	90.260.520	Concrete Volume C20/C25:	2.4 m³ (85 ft³)
Children's Age:	3+	Number of skilled installers required:	2
Fall Height (DIN EN 1176):	1.42 m (4'-8")	Installation Time without foundation:	9 hours
Length x Width x Height:	6.8 m x 5.9 m x 3.1 m (22'-4" x 19'-5" x 10'-2")	Dimensions of largest part:	2.2 m x 0.3 m x 0.2 m (7'-3" x 1'-0" x 0'-8")
Protective Surfacing Area (DIN EN 1176):	13.1 m x 13.1 m	Weight of the heaviest part:	49 kg (109 lbs)
Protective Surfacing Area (ASTM 1487):	14.5 m x 14.5 m (47'-7" x 47'-7")	Shipping Volume:	8.1 m³ (287 ft³)
Minimum space required DIN EN 1176:	103.2 m²	Shipping Weight:	570 kg (1257 lbs)
Minimum space required ASTM 1487:	130.7 m² (1407 ft²)	Spare part guarantee:	Lifelong
		Certificate according to DIN EN 1176:	No.: Z2 14 09 10256 223 TÜV Product Service

Technical Data.

The following text can also be used for tenders.

Posts:

Steel pipes Ø 133 mm (5 ¼"); wall thickness 5 - 10 mm (3/16" - 3/8") with a round cast aluminum post top; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Swing seat:

The black rubber safety swing seat is connected by stainless steel chains rotatably mounted to the cross tube mounted in maintenance free nylon bushes

Nodes:

Framework[®]-aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; securely closed with durable EPDM-caps


Berliner
Berliner Seilfabrik GmbH & Co.
Lengeder Straße 2/4
D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
www.berliner-seilfabrik.com

